


MX-4CR-RM

FOUR STATION RELAY MODULE

Door Control Relays Modules ensure compatibility of access hardware components and simplify system installation and troubleshooting. Different modules may be specified for one power supply. The isolated relay design allows small gauge cable runs of 22 gauge wire up to 1000 feet from the trigger device to the module.

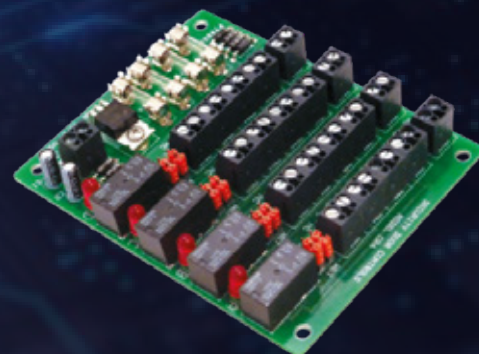

Features

- Allows for independent control of up to four separate electrified locking devices.
- Distributes the primary DC output of any 600 series power supply into four, individually controlled relay DPDT outputs.
- Each output is individually fused, and selectable as wet or dry.
- LED's provide relay activation status.

Specification

Model	MX-4CR-RM
Voltage Input	120 mA @ 12/24VDC
Inputs & Outputs	(a) Fused, 2A SPDT dry outputs or voltage outputs (b) 2A SPDT dry outputs or voltage outputs (c) N.O. dry trigger inputs
Dimensions	4.25" L x 3.375" W