


MX-EA01

Enhanced Alarm Output and Integrated Fire Control Expansion Controller

MX-EA01 Enhanced Alarm Output and Integrated Fire Control Expansion Controller with alarm output and fire linkage expansion board, with access controllers, software settings can be achieved with the fire and alarm output signals. Four alarm output, software can be freely defined to the host controller of a door or a few gate functions.

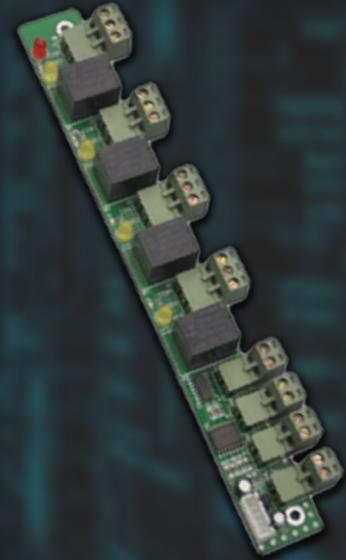

Overview

MX-EA01 Enhanced Alarm Output and Integrated Fire Control Expansion Controller with alarm output and fire linkage expansion board, with access controllers, software settings can be achieved with the fire and alarm output signals. Four alarm output, software can be freely defined to the host controller of a door or a few gate functions.

Features

This enhanced Alarm Output and Integrated Fire Control Expansion Panel only can compat with the MX-E series controller.

- 1.4-way alarm output, you can specify which function to which door of the controled area
- 2.The controller can connect the fire control output, when fire signal received, doors in the controlled area will be open automatically, and fire alarm will be recorded.
- 3.The controller can control: invalid break in alarm, long time unlocking alarm, intimidation break in alarm, unlocking linkage ouput, invalid card swiping alarm, integrated fire control alarm
- 4.Allow to change anti-intimidation password
- 5.The controller can set long time unlocking alarm time: 0-6000 seconds
- 6.The controller can set the time delay of each output from 0 to 6000 seconds



MX-EA01

Expansion Controller

Specification

Model	MX-EA01
Can Control:	Invalid Break In Alarm, Long Time Unlocking Alarm, Intimidation Break In Alarm, Unlocking Linkage Output, Invalid Card Swiping Alarm, Integrated Fire Control Alarm
Should pay attention to:	This enhanced Alarm Output and Integrated Fire Control Expansion Panel only can compat with the NS-110 series controller, and the software should be V6.6 or higher version.
Output and input :	4-way input and 4-way alarm output. You can specify which function to which door of the controled area .Can connect the fire control output, when fire signal received, doors in the controlled area will be open automatically, and fire alarm will be recorded.
Other:	Allow to change anti-intimidation password
	Can set long time unlocking alarm time: 0-6000 seconds
	Can set the time delay of each output from 0 to 6000 seconds
Unit Packing Way	Brown box
Accessories	User Manual, warranty card, necessary parts for connecting panel
Package Size	214*36*143mm

